

# INDEPENDENT BATTERY CERTIFICATE



CERTIFICATE NUMBER: B8778AD3-C889-4775-9AB1-AD688D407FA4

## VEHICLE

**BRAND:** MINI  
**MODEL:** Cooper SE - 32,6 kWh

**MILEAGE:** 4,033 km  
**VIN:** WMW11DJ0602V59674  
**DATE AND TIME:**  
27/04/2026, 09:03

**EXECUTED BY:** AAA Auto

## RESULTS

Independent  
**STATE OF HEALTH (SOH)**

# 97.7 %

**ENERGY** 32kWh | 33kWh




**WLTP RANGE** 227km | 232km

## RATING

### BENCHMARKING

How does your vehicle compare to comparable vehicles?

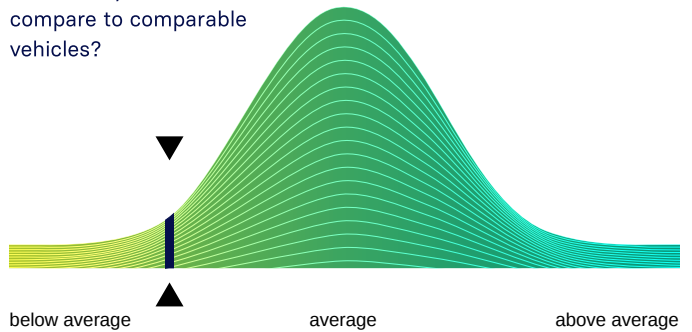

below average      average      above average

## CHECKS

- Battery Management System (BMS) ✓
- Battery Sensor ✓
- Battery Measurements ✓
- Battery Cell Voltages ✓
- Vehicle Communication ✓



SCAN FOR DETAILS

## EVALUATION

### GOOD HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in good condition.

The drive battery is therefore officially AVILOO Certified.

Dr. Marcus Berger, CEO



## ENERGY

	Gross	Net (Nominal)	Usable
Current:	35.9kWh	32.0kWh	28.8kWh
New:	36.7kWh	32.7kWh	29.5kWh

## RANGE

	WLTP	Typical
Current:	227km	184km
New:	232km	188km

## EXECUTION PROTOCOL

	09:03:42
AVILOO Box connected.	
FLASH Test started.	✓
Vehicle detected.	✓
Starting data acquisition.	✓
Finished data acquisition.	✓
Analyzing data.	✓
Analysis completed.	✓

## SENSORS

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

## BMS

	Value	Status
BMS State of Charge (SoC)*:	88%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	100%	
SoH calculation accuracy:		✓

## MEASUREMENTS

	Min	Max	Delta	Status
Battery Temperature	8.0°C	9.0°C	1.0°C	✓
Cell Voltage	4.050V	4.054V	4mV	✓
Pack Voltage	388.9V			
Average Current	-1.1A			

\*The values shown here were read directly from the vehicle's battery management system (BMS) and are calculated and provided by the vehicle manufacturer. The State of Health (SoH) displayed corresponds to the value reported by the BMS and is CARA-certified.

**DISCLAIMER:** The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOO's algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Management System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.